

Job Name: _____

Type: _____

Voltage: _____

FOR USE WITH THE FOLLOWING EMERGENCY UNITS ONLY:


**EC SERIES
ER SERIES
EL SERIES**

**ND SERIES
NW SERIES**

**NS SERIES
VNX SERIES**


Suffix	Volts	Watts	Lumens	Beam CP	Industry Number	Isofootcandle Dist. Curve #	Lamp Type
-25	6	5.4	70	325	939	15	Tungsten Wedge Base
-03	6	7.2	101	360	927		Tungsten Wedge Base
-04	6	9	151	400	908	1	Tungsten Wedge Base
-05	6	6	113	400	784	2	Bi-Pin Halogen
-06	6	8	163	550	785	2	Bi-Pin Halogen
-07	6	10	201	650	787	3	Bi-Pin Halogen
-08	6	12	239	850	786	3	Bi-Pin Halogen
-09	6	20	402	1400	788		Bi-Pin Halogen
-11	6	8	132	400	7613	9	PAR36 Sealed Beam
-13	6	18	243	1500	4014	8	PAR36 Sealed Beam
-14	6	25	318	800	4510	13	PAR36 Sealed Beam
-20	6	30			4515		PAR36 Sealed Beam
-15	6	6	113	400	H7556	9	PAR36 Halogen Sealed Beam
-16	6	8	115	550	H7551	10	PAR36 Halogen Sealed Beam
-17	6	10	201	650	H7552	11	PAR36 Halogen Sealed Beam
-18	6	12	302	850	H7553	6	PAR36 Halogen Sealed Beam
-19	6	20	457	1400	H7554	12	PAR36 Halogen Sealed Beam
-51	12	9	138	360	915		Tungsten Wedge Base
-52	12	12.5	177	650	922		Tungsten Wedge Base
-53	12	8	155	550	774	2	Bi-Pin Halogen
-73	12	10			780		Bi-Pin Halogen
-54	12	12	277	850	783	3	Bi-Pin Halogen
-56	12	20	461	1400	782		Bi-Pin Halogen
-57	12	30			791		Bi-Pin Halogen
-58	12	40			792		Bi-Pin Halogen
-127	12	50					Bi-Pin Halogen
-59	12	12	182	1100	4044	7	PAR36 Sealed Beam
-60	12	18	245	1500	4414	8	PAR36 Sealed Beam
-61	12	25	327	400	4446	14	PAR36 Sealed Beam
-66	12	30			4405		PAR36 Sealed Beam
-62	12	35			4406		PAR36 Sealed Beam
-63	12	8	155	550	H7555	10	PAR36 Halogen Sealed Beam
-64	12	12	277	850	H7557	6	PAR36 Halogen Sealed Beam
-33	12	37.5			H7616		PAR36 Halogen Sealed Beam
-74	12	50		1000	H7606		PAR36 Halogen Sealed Beam
-89	24	9	132	400	624		Double Contact Bayonet Base
-90	24	12	201	1100	306		Double Contact Bayonet Base
-94	24	18			1204		Double Contact Bayonet Base
-91	24	24	312	800	1638	4	Double Contact Bayonet Base
-100	24	20	295	750	13091		Bi-Pin Halogen

LAMP HEAD PHOTOMETRICS

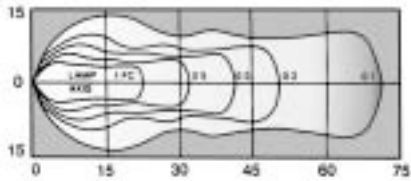


#1 Tungsten Wedge Base

Lamp Suffix	Volts	Watts
-04	6	9

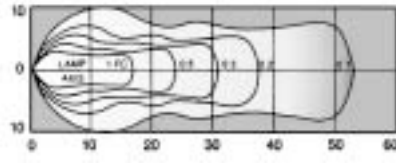


#2 Bi-Pin Halogen Base

Lamp Suffix	Volts	Watts
-05	6	6
-06	6	8
-53	12	8

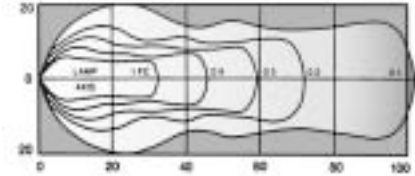


#3 Bi-Pin Halogen Base

Lamp Suffix	Volts	Watts
-07	6	10
-08	6	12
-54	12	12

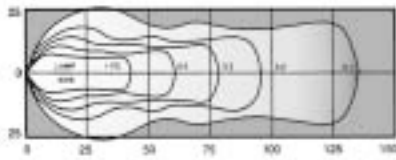


#4 Double Contact Bayonet Base

Lamp Suffix	Volts	Watts
-91	24	24

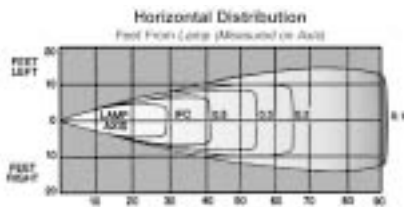

Horizontal Distribution

Feet From Lamp (Measured on Axis)

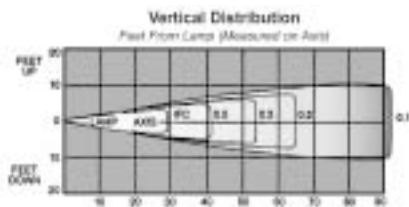


Vertical Distribution

Feet From Lamp (Measured on Axis)


#6 PAR36 Halogen Sealed Beam

Lamp Suffix	Volts	Watts
-18	6	12
-64	12	12

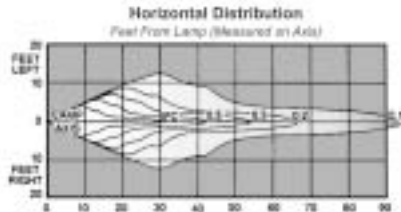

Horizontal Distribution

Feet From Lamp (Measured on Axis)

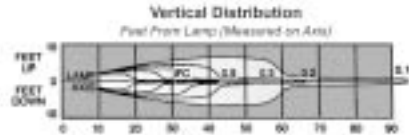


Vertical Distribution

Feet From Lamp (Measured on Axis)


#7 PAR36 Sealed Beam

Lamp Suffix	Volts	Watts
-59	12	12

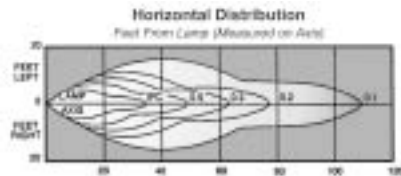

Horizontal Distribution

Feet From Lamp (Measured on Axis)

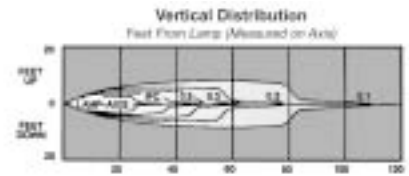


Vertical Distribution

Feet From Lamp (Measured on Axis)


#8 PAR36 Sealed Beam

Lamp Suffix	Volts	Watts
-13	6	18
-60	12	18

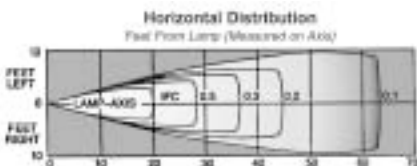

Horizontal Distribution

Feet From Lamp (Measured on Axis)

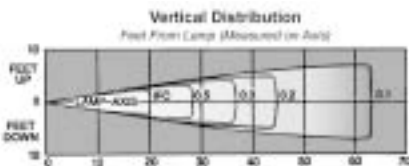



Vertical Distribution

Feet From Lamp (Measured on Axis)

#9 PAR36 Sealed Beam



Lamp Suffix	Volts	Watts
-11	6	8

LAMP HEAD PHOTOMETRICS

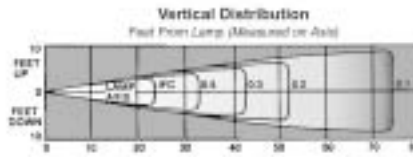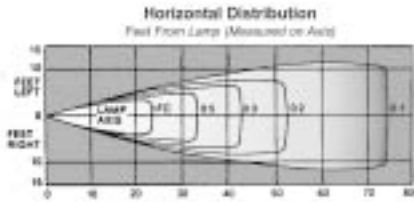



#10 PAR36 Halogen Sealed Beam

Lamp Suffix	Volts	Watts
-16	6	8
-63	12	8

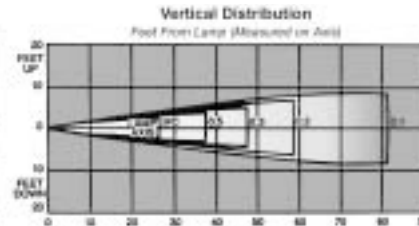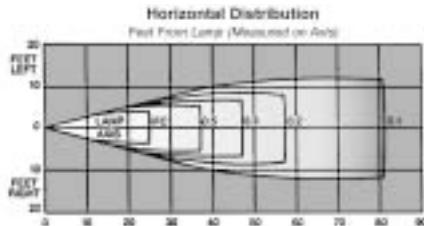



#11 PAR36 Halogen Sealed Beam

Lamp Suffix	Volts	Watts
-17	6	10

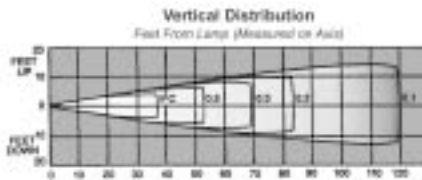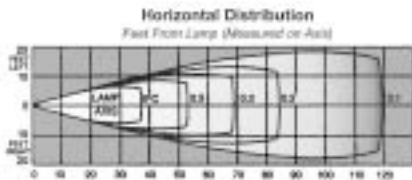



#12 PAR36 Halogen Sealed Beam

Lamp Suffix	Volts	Watts
-19	6	20

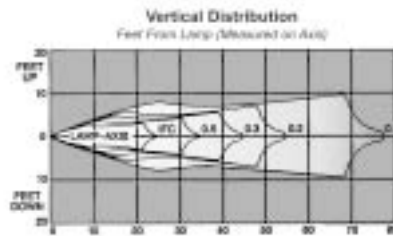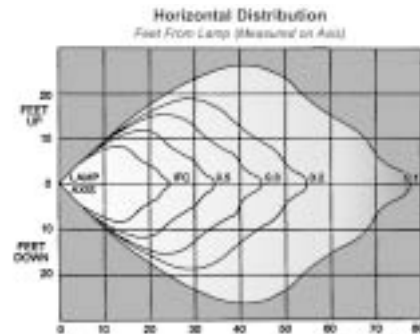

#13 PAR36 Halogen Sealed Beam


Lamp Suffix	Volts	Watts
-14	6	25

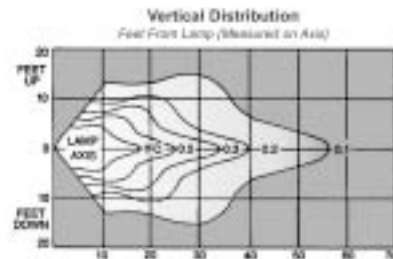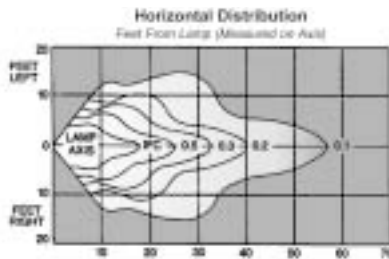

#14 PAR36 Sealed Beam

Lamp Suffix	Volts	Watts
-61	12	25

Horizontal Distribution
Feet From Lamp (Measured on Axis)

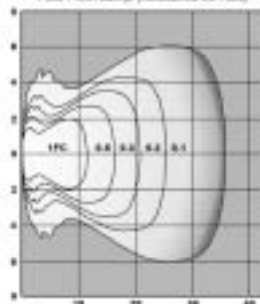


#15 Tungsten Wedge Base


Lamp Suffix	Volts	Watts
-25	6	5.4

LAMP HEAD PHOTOMETRICS

Horizontal Distribution
 Feet From Lamp (Measured on Axis)

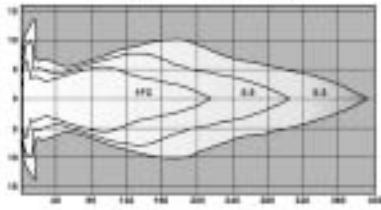

Vertical Distribution
 Feet From Lamp (Measured on Axis)

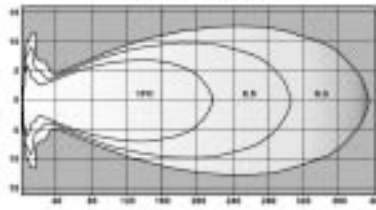

#16 PAR36 Halogen Sealed Beam		
Lamp Suffix	Volts	Watts
-74	12	50