


CURVED ALUMINUM INDIRECT WALL

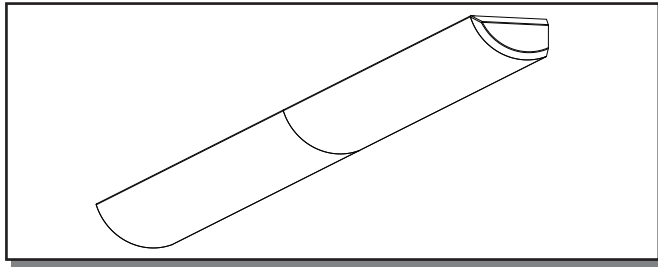

4', 8', or 12'
1 or 2 Lamp
T8

APPLICATION

- Surface wall-mounted indirect luminaire.
- Suitable for individual or continuous row mounting.

CONSTRUCTION/FINISH

- No visible hardware.
- Extruded aluminum in lengths up to 12 feet.
- Rows of more than 12 feet are joined internally with no visible fasteners.
- Semi-gloss white powder coat paint is standard. Custom colors are available.


ELECTRICAL

- UL listed for damp locations.
- Class P, HPF ballasts comply with ©Federal Ballast Law (public law 100-357, 1988.)
- Self-contained low-profile emergency power pack can be incorporated. UL listed for dry locations.
- Modular wiring may be incorporated for continuous row applications.

REFLECTOR/SHIELDING

- One piece specular aluminum reflector.
- Choice of open top or acrylic lens.

CATALOG NUMBER

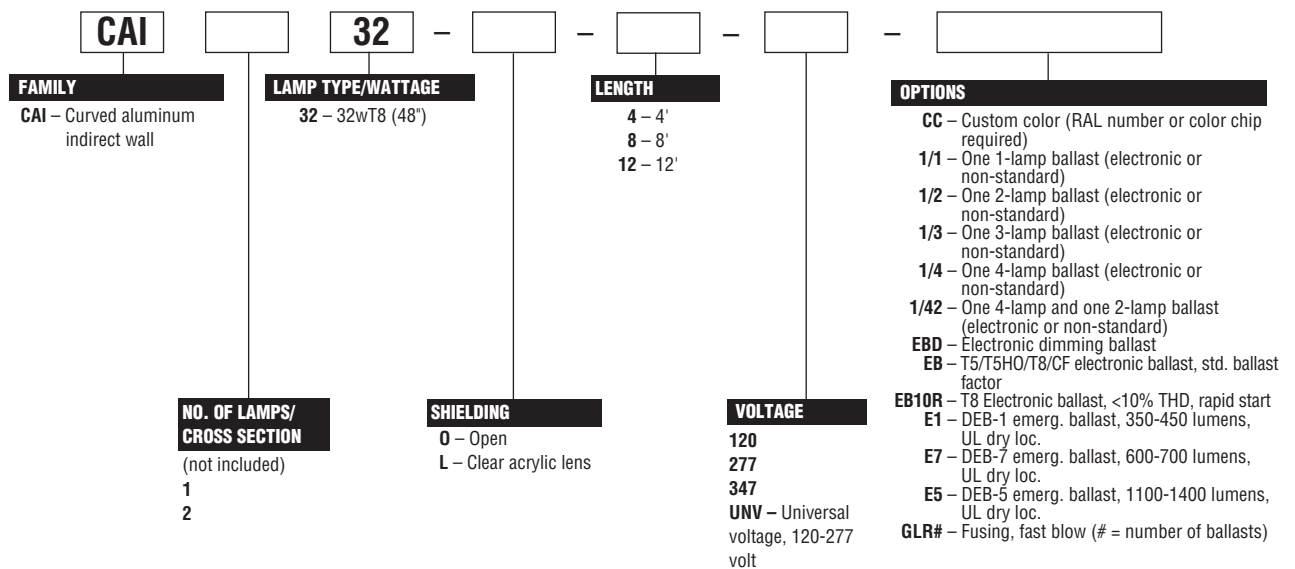

JOB INFORMATION

0675-AR

PHILIPS
Day-Brite

