

**4' or 8'
2 Lamp
T8 or T12**


CONSTRUCTION/FINISH

- Standard diffuser is flat bottom prismatic acrylic with linear side and end prisms.
- Optional high impact diffuser is made from 100% DR (high impact) acrylic.
- Diffuser end caps are injection molded acrylic.
- Diffuser hinges and latches from either side with 4 torsion springs.
- Housing is multi-stage phosphate treated for maximum corrosion resistance and finish coat is high reflectance baked white enamel.
- Multiple knockouts accommodate a variety of mounting methods.
- Heavy duty channel of code gauge die formed steel.
- For surface or stem mounting.

ELECTRICAL

- UL listed for direct mounting to low density ceilings.
- UL listed for damp location.
- Class P, HPF, CBM certified ballasts comply with Federal Ballast Law (Public Law 100-357,1988).
- Lampholders snap into socket plates and may be individually replaced or rewired.
- Self-contained fluorescent emergency power packs can be incorporated.

CATALOG NUMBER

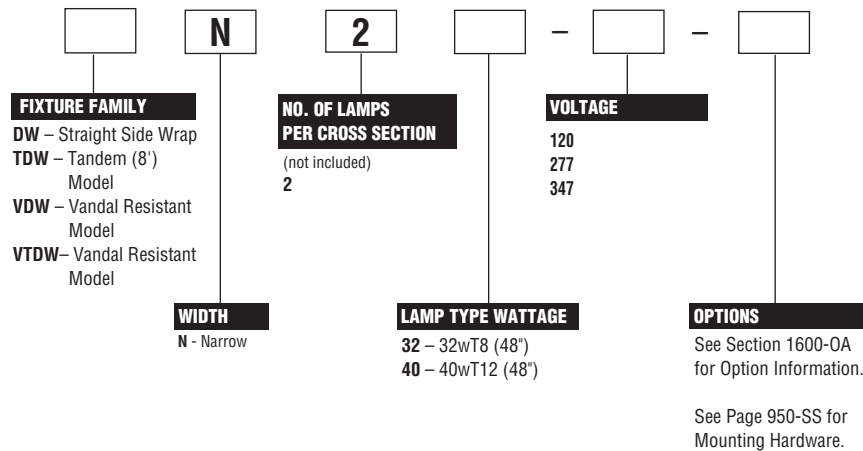

NOTES:

- With generic Electronic Ballasts (Brand selected by Day-Brite)
Suffix Catalog # with **-Ballast Quantity - / -EB Lamps Per Ballast.**

Example: -1/2-EB = One 2 Lamp Electronic Ballast.
Example: -2/2-EB = Two 2 Lamp Electronic Ballasts.

