

**T5 Solid Front  
22", 34", or 46"  
1 Lamp**

**A very shallow specification grade undercabinet lighting fixture with electronic ballast.**

**CONSTRUCTION/FINISH**

- Specification grade undercabinet light fixture.
- All metal parts painted after fabrication with white polyester paint finish.
- Lens removable without tools for easy maintenance and cleaning.
- All electrical components mounted on an easily removable service tray.
- Low profile (only 1-1/8" deep) provides neat, trim appearance.


**ELECTRICAL**

- UL listed.
- Electronic ballast is standard.
- T5 triphosphor (835) lamp is supplied as standard.
- Optional switch or grounded convenience outlet available on 120v models only.

**ENCLOSURE**

- 100% acrylic lens.
- Lens easily removable without tools.
- Linear prisms hide the lamp image and uniformly distribute the light output.


**CATALOG NUMBER**

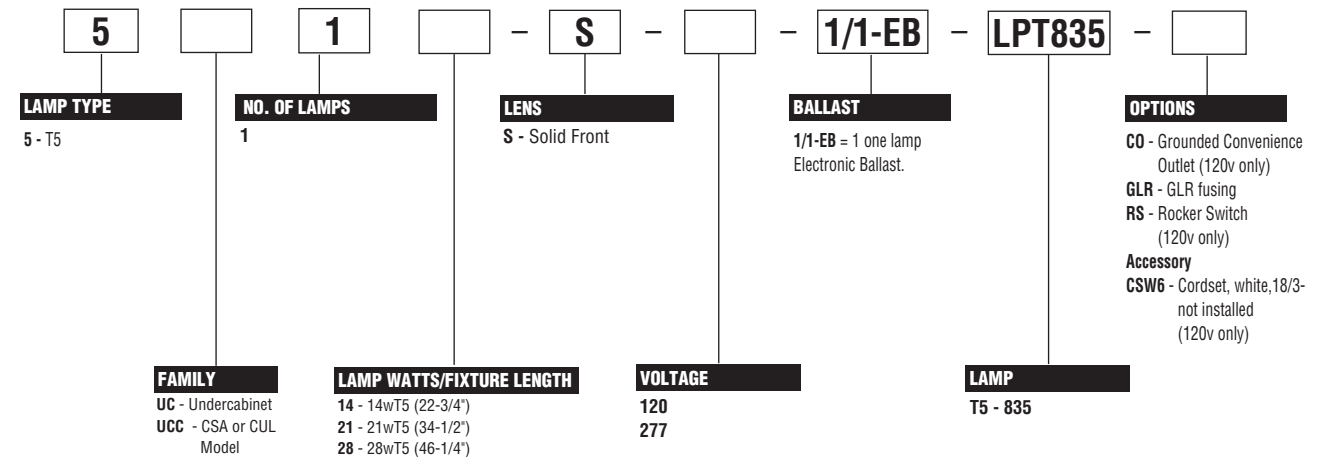

# T5 SPECIFICATION UNDERCABINET




## DIMENSIONS

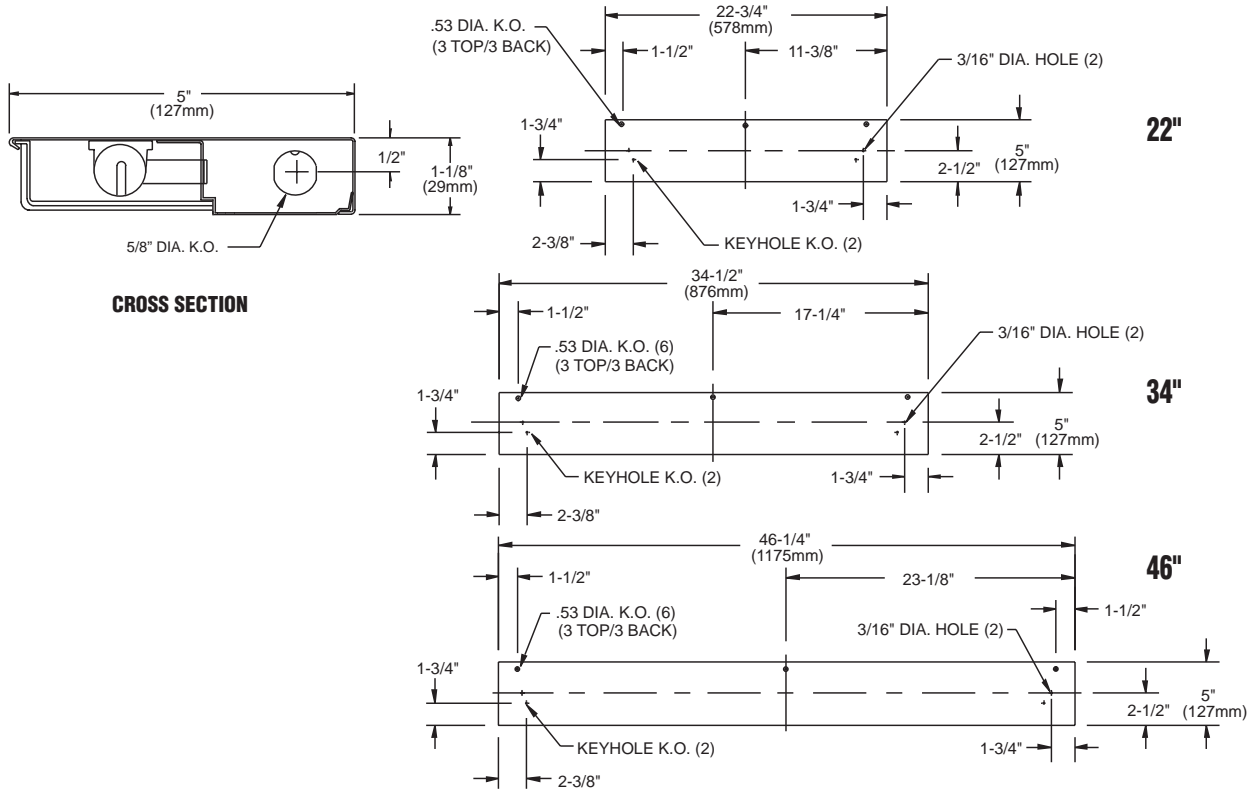

<b>PHOTOMETRIC DATA</b>	CATALOG # 5UC128S	LAMPS = F28T5	INPUT WATTS = 29	FIXTURE EFFICIENCY = 79.6%
	TEST #17847	S/MH = 1.3	BALLAST = ELECTRONIC	

LUMEN SUMMARY			
ANGLE	LUMENS	%LAMP	%FIXTURE
(0-30)	821	28.3	35.6
(0-40)	1312	45.2	56.8
(0-60)	2011	69.4	87.1
(0-90)	2309	79.6	100.0
(90-180)	0	0	0
(0-180)	2309	79.6	100.0



INITIAL FOOTCANDLES CORRESPOND TO TABLE 1.0  
4FT-T5W/ SOLID FRONT

	A	B	C	D	E
1	120	242	281	240	124
2	96	184	214	186	96
3	51	97	113	97	53
4	24	37	45	40	23

