

NITE BRITES

JOB NAME _____

TYPE _____

BIS-RLM SERIES - NATALIE

50-175 watt Metal Halide
 35-150 watt High Pressure Sodium
 26-60 watt Compact Fluorescent

The RLM Series offers unique designs and old standards to enhance the aesthetic appeal of restaurants, retail stores, businesses, and other areas where decorative reflector units are desired.



Day-Brite® Lighting

ORDERING MATRIX

SAMPLE CATALOG NUMBER: BIS070MXX-NAT-D10-CP

BIS	[]	[]	XX	-	NAT	-	[]	-	[]
<u>FAMILY</u> BIS		<u>LAMP SOURCE</u> C - Compact Fluorescent M - Metal Halide S - High Pressure Sodium I - Incandescent	<u>VOLTAGE</u> XX - Universal		<u>REFLECTOR</u> NAT - Natalie		<u>DIAMETER</u> D08 - 8" D10 - 10" D12 - 12"		<u>PAINT COLORS</u> WT - White BK - Black BZ - Bronze GY - Gray AL - Aluminum GV - Galvanized SY - Sunflower Yellow FR - Fire Red LB - Cornflower Blue DB - Deep Ocean Blue FG - Forest Green GB - Gloss Black CP - Metallic Copper BM - Metallic Bronze NK - Metallic Nickel GS - Greystone BS - Brownstone
	<u>WATTAGE</u> 035 - 35 ²³ 050 - 50 ⁵ 070 - 70 100 - 100 150 - 150 175 - 175 ¹ 200 - 200 ⁹⁶ 26C - 26WCFL ⁷² 32C - 32WCFL ⁷² 42C - 42WCFL ⁷² 57C - 57WCFL ⁷² 60C - 60WCFL ⁷²								

ACCESSORIES (order separately)

For additional descriptions of accessories, refer to sheet numbers DC-47900 and DC-47910.

Footnotes:


- ¹Metal Halide only.
- ²DT only.
- ²³120V High Pressure Sodium Only.
- ⁷²Compact Fluorescent Only.
- ⁹⁶Incandescent Only.

General Notes:

- All options are factory installed.
- Medium base lamp only.
- GX24q lamp base for 26-57W compact fluorescent.
- 2G8 lamp base for 60W compact fluorescent.
- All accessories are field installed.


Warning: Refer to and follow the lamp manufacturer's warnings and instructions.

DIMENSIONS

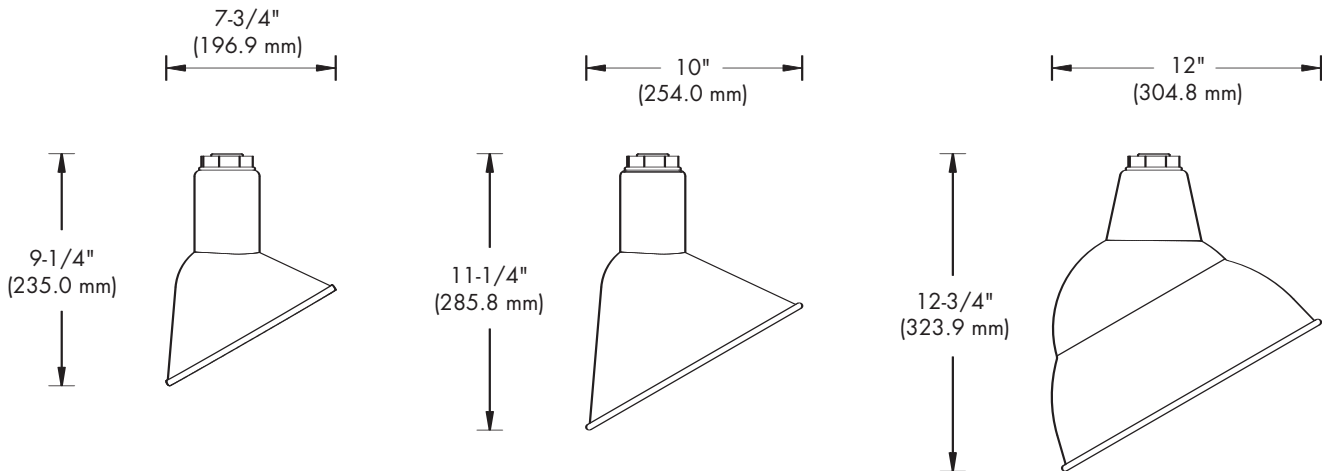


BIS - RLM SERIES - NATALIE


PHOTOMETRICS






BIS100iXX-NAT-D10 90:.....
0: —
TEST NUMBER: 26260
LAMP: 100W A19
LUMENS: 1,680
MOUNTING HEIGHT: 12 FEET

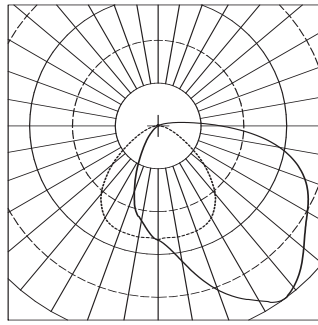

BIS175MXX-NAT-D10 90:.....
0: —
TEST NUMBER: 26261
LAMP: 175W MH, COATED
LUMENS: 15,000
MOUNTING HEIGHT: 12 FEET

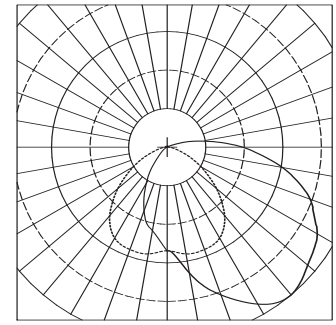


BIS42CCXX-NAT-D10 90:.....
0: —
TEST NUMBER: 26276
LAMP: 42W CFL
LUMENS: 3,200
MOUNTING HEIGHT: 12 FEET

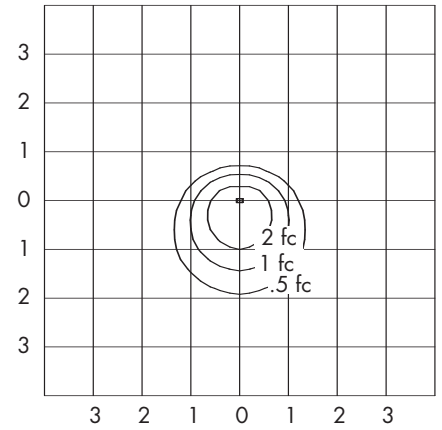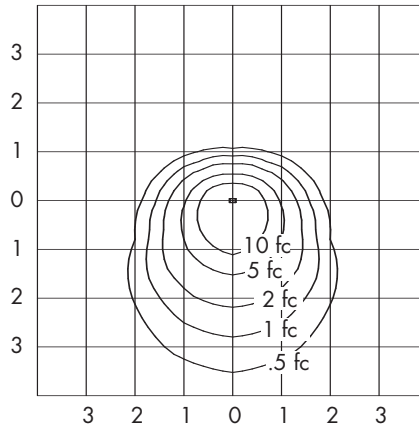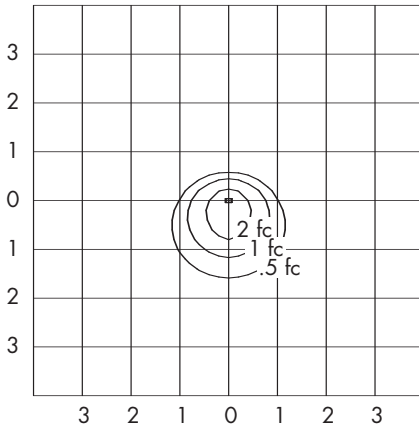

UNITS SHOWN IN TERMS OF MOUNTING HEIGHT
INITIAL FOOTCANDLES SHOWN

PRODUCT FEATURES

- UL 1598 Listed for wet location and 25°C ambient for all lamp wattages listed.
- 1. 1/2" NPT threaded hub for easy, positive mounting.
- 2. Spun aluminum reflector with polyester powder finish.

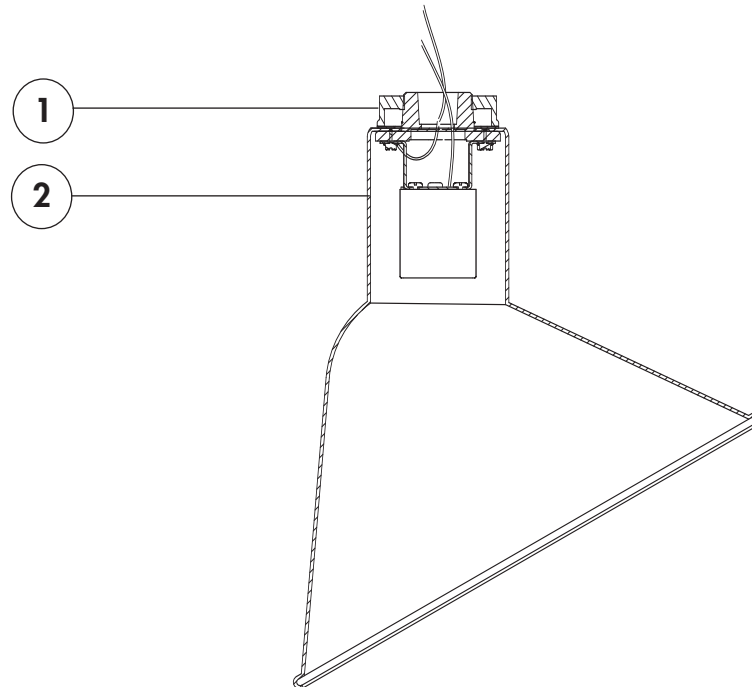

Visit our web site at www.daybritelighting.com

776 South Green Street Tupelo, MS 38804 Phone: 662-842-7212 Fax: 662-841-5501

189 Bullock Drive Markham, Ontario Canada L3P 1W4 Phone: 905-294-9570 Fax: 905-294-8911
Day-Brite Lighting reserves the right to make changes without notice. ©August 2006. DL.5M0806

DC-47130

Day-Brite® Lighting
a Genlyte company