

P4R

4" Miniature Remodel Recessed Downlight - Incandescent

Catalog Number: _____

Type: _____

Project: _____



Description

For remodel construction. Thermally protected recessed housing. Fixture is c/ETL Listed for through-branch circuit wiring and damp location use.

Features

- Compact size permits installation with 2X6 joist construction and as close as 8" on center.
- 50 watt maximum.
- Thermal protection standard.
- c/ETL listed for damp locations and through branch circuit wiring.
- Wide variety of trim options.
- Pre-installed socket.

CATALOG SYSTEM AND OPTIONS

SAMPLE CATALOG NUMBER: P4R-P4BW

Housing

P4R

Trims (choose only one)

P4B	Black Stepped Baffle
P4BW	White Stepped Baffle
P4RC	Clear Reflector
P4RG	Gold Reflector
P4RB	Black Reflector
P4RW	White Reflector
P4EW	White Eyeball
P4EB	Black Eyeball
P4GB	Adjustable Gimbal Black
P4GW	Adjustable Gimbal White
P4F	Fresnel
P4WW	White Wall Wash
P4WB	Black Wall Wash
P4S	Drop Shower

General Notes:

See Trims on reverse side of the sheet for lamp compatibility.

SPECIFICATIONS


- Housing** - Deep drawn 22 gauge steel single piece housing painted white. Adjusts vertically in frame to accommodate ceiling thickness up to 1-3/8" thick. Ceiling opening 4-1/4". Accommodates lamp up to 50 watts depending on trim used. Plaster frame is stamped 22 gauge galvanized steel.
- Socket** - Medium base screw shell porcelain socket attached to adjustable socket supporting bracket.
- Installation** - designed for installation below finished ceiling.

4. **Junction Box** - 17 inch, 18 gauge galvanized steel with two snap-on covers and grounding pigtail. Knock-outs for 1/2" and 3/4" conduit. Includes 4 Romex pryouts with strain relief. Meets all safety requirements of c/ETL and N.E.C.

5. **Thermal Protection** - Standard thermal protection device inside housing automatically takes the fixture out of service if temperature becomes excessive from over lamping or using the wrong lamp/trim combination.

6. **C/ETL Listed** - for damp location and through-branch wiring, 3 in/3 out.

DIMENSIONS

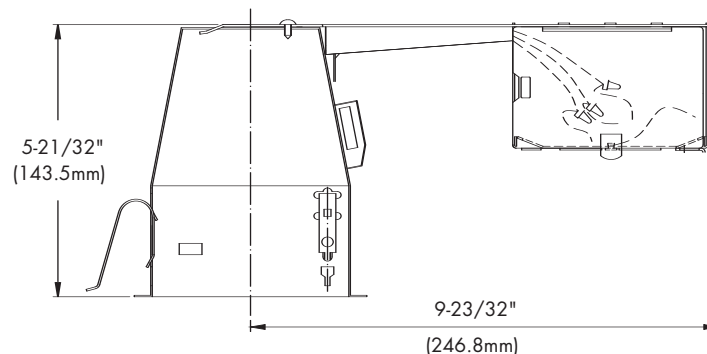

REV. 09/05

4" MINIATURE TRIMS - REMODEL CONSTRUCTION



P4B (Shown)
Black Baffle w/Black Flange
P4BW
White Baffle w/ White Flange
5" O.D. (127mm)

Housing/Lamp/Trim

P4, P4R, P4ASIC

50W/R20
50W/PAR20



P4RC (Shown)
Clear Reflector w/White Flange
P4RG
Gold Reflector w/White Flange
P4RB
Black Reflector w/White Flange
P4RW
White Reflector w/White Flange
5" O.D. (127 mm)

Housing/Lamp/Trim

P4, P4R, P4ASIC

50W/R20
50W/PAR20



P4EW (Shown)
White Eyeball
P4EB
Black Eyeball
5" O.D. (127 mm)

Housing/Lamp/Trim

P4, P4R, P4ASIC

50W/R20
50W/PAR20



P4WB
Black Wall Wash
P4WW
White Wall Wash
5" O.D. (127 mm)

Housing/Lamp/Trim

P4, P4R

50W/R20
50W/PAR20

P4ASIC

30W/R20
35W/PAR20



P4GW
White Adjustable Gimbal
P4GB
Black Adjustable Gimbal
4-7/8" O.D. (124 mm)

Housing/Lamp/Trim

P4, P4R

50W/R20
50W/PAR20

P4ASIC

30W/R20
35W/PAR20



P4F
Fresnel
5" O.D. (127 mm)

Housing/Lamp/Trim

P4, P4R

50W/R20
50W/PAR20

P4ASIC

30W/R20
35W/PAR20



P4S
Shower Light
5" O.D. (127 mm)

Housing/Lamp/Trim

P4, P4R

50W/R20
50W/PAR20

P4ASIC

30W/R20
35W/PAR20

Capri Lighting reserves the right to make changes without notice.©2005