

Job Name: _____

Type: _____

Voltage: _____



CODES AND STANDARDS

UL Listed to Standard 924.
Meets BOCS, ICBO and SBCCI requirements.

ILLUMINATION

Unit is illuminated with glass sealed tubes internally coated with phosphor and filled with tritium gas. The sign is available with a 10, 15, or 20 year life warranty.


HOUSING

Comes standard with an attractive ABS flame retardant housing with optional black or white frames. May be easily installed in ceiling, wall or flush mount applications. Tamper-proof and vandal resistant design incorporates a high impact polycarbonate face. NFPA style field selectable chevrons. Designed to operate in harsh, corrosive, humid or explosive environments.

ELECTRONICS

No external power source required. Suitable for California low level applications. There are no maintenance costs associated with this product. Electronics are rated for a lifetime of 10, 15, or 20 years.

CATALOG NUMBER (Example: SLR10SB)

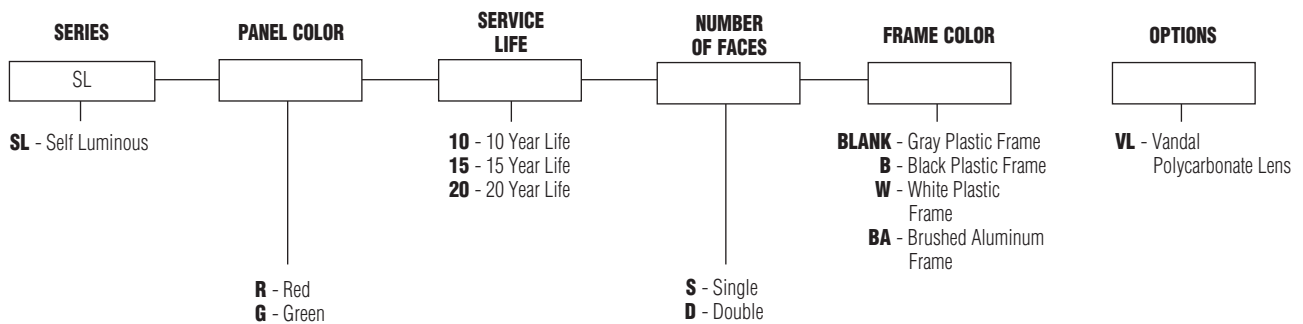

NOTE: Canopy provided on all signs.


Accessories:

- PM - Black 12" Pendant Stem
- WG4 - Wire Guard (Wall Mount Only)


SL SERIES Self-Luminous Exit

DIMENSIONS


Plastic Frame - Single Face

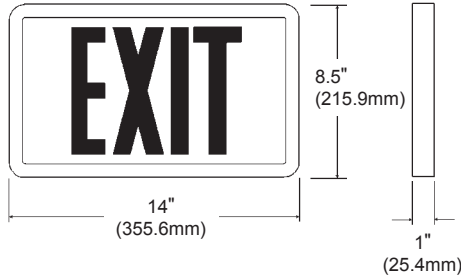

Plastic Frame - Double Face

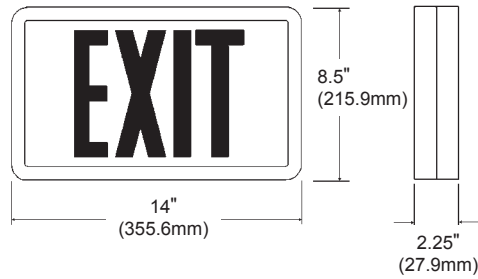

Aluminum Frame - Single Face

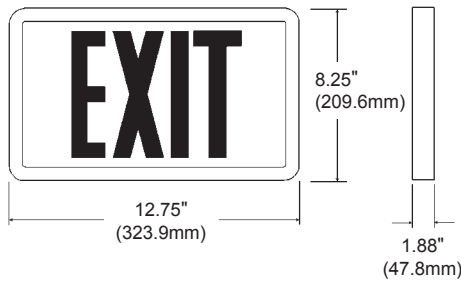

Aluminum Frame - Double Face

