

CRR1NB


6" Recessed Incandescent Housing

Remodel Construction - IC & Non-IC/AirSeal™

Catalog Number: _____

Type: _____

Project: _____



Description

For remodel construction. Thermally protected recessed housing. Fixture suitable for direct contact of ceiling insulation and is AirSeal™ rated. For higher wattage Non-IC applications, ceiling insulation must be a minimum of three inches from recessed fixture. Housing ships without socket bracket and accepts socket supporting trims only.

Features

- IC - 90W Maximum and Non IC - 120W Maximum
- Housing adjusts vertically in plaster frame to allow for variations in ceiling thickness.
- Wide variety of trims.
- Thermal protection standard.
- UL Listed for Through-Branch Circuit Wiring and Damp Locations.
- Airseal rated to ASTM E283.



CATALOG SYSTEM AND OPTIONS

SAMPLE CATALOG NUMBER: CRR1NB-RAC30W

Housing	Trims (choose one)					
CRR1NB	RB30	Black Baffle	RF30W	White	RB45W	Scoop Wall Wash, White Baffle
CRR1NBQP	RB30W	Full White Baffle	RF40C	Chrome Open Trim	RAD40	Deep Cone White
(with quick plug connector)	RB30BRN	Full Brush Nickel Baffle	RF40SB	Satin Brass Open Trim	RAD40BLK	Deep Cone Black
CRR1NBQPG	RB40W	Full White Baffle	RF40W	White	RCS30	Shallow Cone Clear
(with quick plug connector & gasket)	RB40	Black Baffle	RS30W	White Splay	RCS30W	Shallow Cone White
	RC30G	Gold Cone	RS30BRN	Brushed Nickel Splay	RBS30	Shallow Baffle Black
	RC30C	Clear Cone	R18P	White Eyeball	RBS30W	Shallow Baffle White
	RC30BK	Black Cone	R18PB	Polished Brass Eyeball	RBD40	Deep Baffle Black
	RC30W	White Cone	R18BRN	Brushed Nickel Eyeball	RBD40W	Deep Baffle White
	RA100W	White Multiplier	RM38W	White Stepped Baffle, Regressed Eyeball	SHR12IC	Regressed Glass Shower Light
	RA100G	Gold Multiplier	RM38	Black Stepped Baffle, Regressed Eyeball	SHR16IC	Regressed Glass Drop
	RA100C	Clear Multiplier	RM48	Black Stepped Baffle, Regressed Eyeball	SH12IC	Albalite Shower Light
	RBC30	Black with Leaf Springs	RM48W	White Stepped Baffle, Regressed Eyeball	SH36	Drop Round Shower Light
	RBC30W	Full White with Leaf Springs	R38P	Baffled Eyeball	R6SHR	Regressed Open Shower Light
	RAC30W	Full White Cone with Leaf Springs	R38PB	Polished Brass Eyeball		
	RAF30	Black Cone with Leaf Springs	RB45	Scoop Wall Wash, Black Baffle		
	RF30SB	Satin Brass Open Trim				
	RF30C	Chrome				

Custom colors are available on select trims. Please see the Decorative Trims link at www.caprilighting.com to download brochure and for further details.

SPECIFICATIONS

- Housing** - Constructed of .032 aluminum. Accommodates ceilings 1/2" to 1-1/4" thick. Housing can be pulled through plaster frame for access to junction box. Accommodates lamps up to 150 watts, depending on trim used and application to direct contact of ceiling insulation. Ceiling opening of 6-5/16". Dome constructed of heavy-duty steel.
- Installation** - For installation below finished ceiling.
- Socket** - Medium base screw shell porcelain socket, mounted with snap-in clips to top of trim.
- Junction Box** - Extra-large 32 cubic inch 16 gauge galvanized steel with two snap-on covers and grounding pigtail. Knockouts for 1/2" and 3/4" conduit and 4 Romex knockouts with strain relief. Meets all safety requirements of U.L. and the N.E.C.

5. **IC & Non-IC** - Housing is UL Listed for direct contact with thermal insulation. For Non-IC applications higher wattages may be used. Insulation must be kept three inches away from housing in Non-IC applications.

6. **Thermal Protection** - Standard thermal protection device inside housing automatically takes fixture out of service if temperature becomes excessive from contact with insulation, overlampping, or wrong lamp/trim combination.

7. **c/UL Listed** for Damp Locations and Through Branch Wiring, 4 in/4 out.

8. **AirSeal™**: Fixture is AirSeal™ rated according to ASTM E283 to no more than 2.0 cubic feet of air per minute at 75 pascals. Fixture meets Washington State Energy Code and Energy Conservation Code.


Accessories (Order separately)

Enlarge Trim Ring **OV2**
(For use with full reflector, socket supporting IC type trims.)

Options

Quick Plug..... **QP**

DIMENSIONS

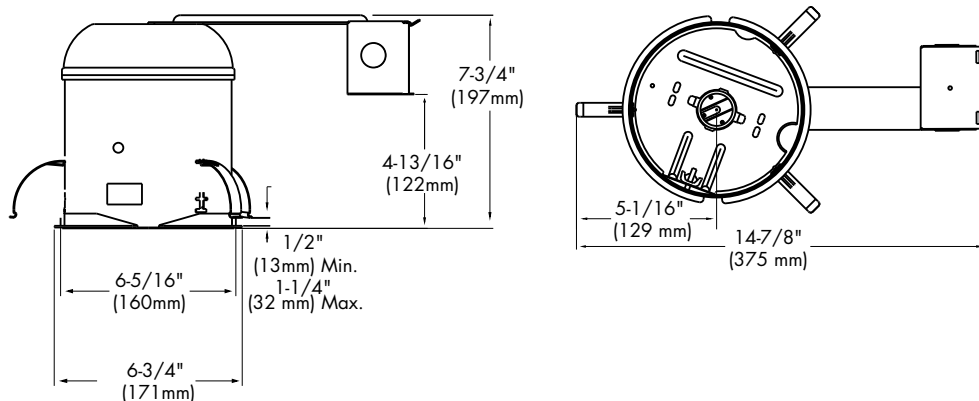

REV. 01/08

6" TRIMS



RB30 (Shown)
Black Baffle

RB30W
Full White Baffle
Socket Supporting

RB30BRN
Full Brushed Nickel Baffle

7-1/16" O.D. (179 mm)

Housing	Lamp	IC Only	Non IC
CR1NB	PAR30LN	75W	
CRR1NB	PAR30	50W	75W
QL1NB	R/BR30	75W	75W
	PAR38	90W	150W



RB40W (Shown)
Full White Baffle

RB40
Full Black Baffle
Socket Supporting

7-1/16" O.D. (179 mm)

Housing	Lamp	IC Only	Non IC
CR1NB	PAR30LN	75W	
CRR1NB	PAR30	50W	75W
QL1NB	R/BR30	75W	75W
	R/BR40	90W	150W
	PAR38	90W	150W



RC30G (Shown)
Gold Cone

RC30C
Clear Cone

RC30BK
Black Cone

RC30W
White Cone

Socket Supporting

7-1/16" O.D. (179 mm)

Housing	Lamp	IC Only	Non IC
CR1NB	PAR30LN	75W	
CRR1NB	PAR30	50W	75W
QL1NB	R/BR30	75W	75W
	PAR38	90W	150W



R18P
White Eyeball (shown)

R18PB
Polished Brass

R18BRN
Brushed Nickel
Socket Supporting

30° Tilt
8" O.D. (203 mm)

Housing	Lamp	IC Only	Non IC
CR1NB	PAR30L	75W	
CRR1NB	R/BR30	75W	100W
QL1NB	R/BR30	75W	75W
R9ASIC	PAR30L	75W	
	R/BR30	65W	



RBC30 (Shown)
Black Baffle w/ Leaf Springs

RBC30W
Full White Baffle w/ Leaf Springs
Socket Supporting

7-1/16" O.D. (179 mm)

Housing	Lamp	IC Only	Non IC
CR1NB	PAR30LN	50W	75W
CRR1NB	PAR30	50W	75W
QL1NB	R/BR30	75W	75W
	PAR38	90W	150W



RAC30W (Shown)
Full White Cone w/ Leaf Springs

RAC30
Black Cone w/ Leaf Springs
Socket Supporting

7-1/16" O.D. (179 mm)

Housing	Lamp	IC Only	Non IC
CR1NB	PAR30LN	75W	
CRR1NB	PAR30	50W	75W
QL1NB	R/BR30	75W	75W
	PAR38	90W	150W



RF30SB (Shown)
Satin Brass Open Trim
with Socket Bracket

RF30C
Chrome

RF30W
White

Socket Supporting

8" O.D. (203 mm)

Housing	Lamp	IC Only	Non IC
CR1NB	PAR30LN	75W	
CRR1NB	PAR30	50W	75W
QL1NB	R/BR30	65W	75W
R9ASIC	PAR30L	75W	
	R/BR30	45W	
RR9ASIC	PAR30	50W	



RF40C (Shown)
Chrome Open Trim
with Socket Bracket

RF40SB
Satin Brass

RF40W
White

Socket Supporting

8" O.D. (203 mm)

Housing	Lamp	IC Only	Non IC
CR1NB	PAR38		150W
CRR1NB	R/BR40		150W
QL1NB			



RS30W
White Splay

RS30BRN
Brushed Nickel Splay
Socket Supporting

7-1/16" O.D. (179 mm)

Housing	Lamp	IC Only	Non IC
CR1NB	PAR30LN	75W	75W
CRR1NB	PAR30	75W	75W
QL1NB	R/BR30	75W	
R9ASIC	PAR30L	75W	
	R/BR30	65W	
RR9ASIC	PAR30	50W	



SH12IC
Albalite Shower Light
Wet location approved

Socket Supporting
8" O.D. (203 mm)

Housing	Lamp	IC	Non-IC
CR1NB	A19	25W	
CRR1NB			
QL1NB			



R6SHR (Shown)
Recessed Open Shower Light
Wet Location Approved
Socket Supporting
7-1/16" O.D. (179 mm)

Housing	Lamp	IC Only	Non IC
CR1NB	PAR30	75W	75W
CRR1NB			
QL1NB			



SHR12IC
Regressed Glass Shower Light
Wet Location Approved

Socket Supporting
8" O.D. (203 mm)

Housing	Lamp	IC Only	Non IC
CR1NB	A19	25W	60W
CRR1NB			
QL1NB			

Trims shown here are the most popular choices. For a complete trim offering see sheet numbers RC1-23A & RC1-23B or go to the Capri Trim Gallery at www.caprilighting.com

Custom colors are available on select trims. Please see the Decorative Trims link at www.caprilighting.com to download brochure and for further details.

This product may be covered by one or more of the following U.S. Patents: #4,408,262, #4,703,406, #4,723,747, #4,910,651, #5,057,979. Other U.S. or Foreign Patents may apply.

Capri Lighting reserves the right to make changes without notice. ©2008

RC1-17

CAPRI LIGHTING:
776 South Green St., Tupelo, MS 38804
Phone 662.842.7212 FAX 662.841.5501
www.caprilighting.com

CANADIAN DIVISION:
189 Bullock Drive, Markham, Ontario, Canada L3P 1W4
Phone 905.294.9570 FAX 800.268.0003

capri
LIGHTING