


# OM8500PAR56RADJ45

## 8" PAR Recessed Adjustables

CAT. NO:

TYPE: PROJECT:

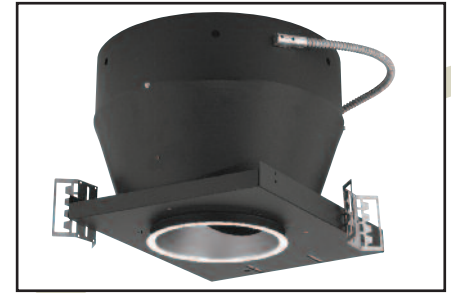



### PRODUCT INFORMATION

#### Applications

Recessed 45° adjustable downlight well suited for general or accent lighting in sloped ceiling applications, in higher ceilings of auditoriums, schools, churches, restaurants, hotels, and offices. Full horizontal rotation makes this fixture ideal for highlighting store displays, sculpture or architectural details. Lamp tilt and rotation lock into place for fixed aiming during servicing. Low brightness trim matches other 8" aperture downlights from Omega.

#### Specifications

- Mounting pan** - Precision die-formed 20 gauge bonderized steel mounting pan.
- Housing** - Housing of 20 gauge bonderized steel, matte black finish. Locking yoke allows full 360° horizontal rotation and 45° vertical tilt for aiming flexibility.
- Installation** - Mounting pan has pre-installed universal mounting brackets with vertical adjustment. Junction box and mounting brackets are accessible from below ceiling. Allow 2" above unit for servicing from below. For 30" C-channel hanger pair, specify Q1030 accessory, ordered separately. For 27" flat bar hangers, specify Q1031 accessory, ordered separately.
- Trim** - Precision spun .051 aluminum, self flanged with clear specular Alzak finish. Standard flat flange is painted white. Optional polished flange matching finish available, add FF to catalog number.
- Baffle** - Precision machined .051 aluminum with deep grooves to eliminate aperture glare, anodized matte black or matte white finish. Standard flat flange is painted white. Optional black flange available, add FF to catalog number.
- Socket** - Porcelain 125V mogul end prong socket with nickel-plated copper contacts and 200°C wire.
- Junction box** - Large 28-cubic inch 14 gauge galvanized steel with snap-on covers. Approved for through wiring with up to 8 #12 AWG conductors.
- Thermal protection** - A thermal protection device which meets all U.L. and NEC requirements is standard.
- U.L. Listed** - For use in damp locations, marked spacing required and approved for Through Branch Circuit Wiring. I.B.E.W. union made.

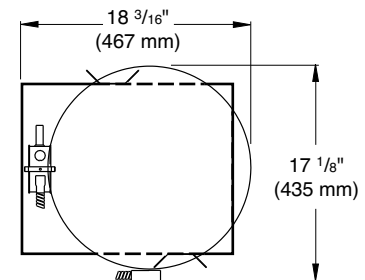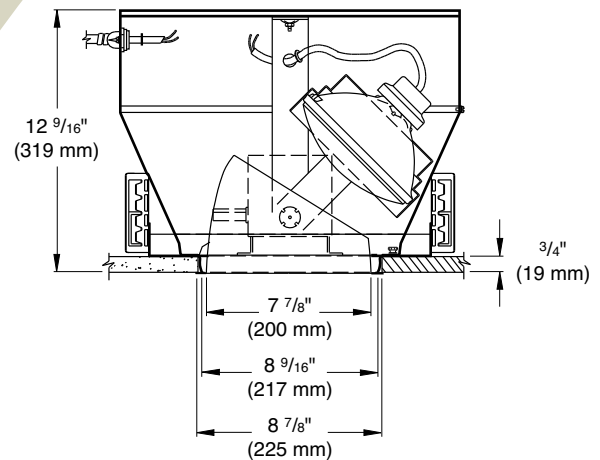

C-Channel not included.

✦ Canadian Specifications may vary from these shown, consult Canadian Division.

8

### CATALOG SYSTEM AND OPTIONS

EXAMPLE OF COMPLETE CATALOG NUMBER: OM8500PAR56RADJ45-CS

OMEGA Aptr.	Lamp (by others)	Product Family	Top Relamping	Reflector Option	Reflector Finish*	Frame Options
OM8	500 PAR56 300 PAR56	RADJ45 Recessed Adjustable	TR Top Relamping	BB Black Baffle	CS Clear Specular CSS Clear Semi-Specular HZ Haze GS Champagne Gold Specular WT Wheat PW Pewter FF Finish Flange (As suffix to color)	FB Flat Bar Hangers



**FIVE YEAR**  
Warranty

\*Consult factory for other reflector finishes.

