

CT9578, CT9579

Line Voltage 120V
Wall Wash

Catalog Number: _____

Type _____

Project: _____



CT9578

Description

Compact fluorescent task light. Adjustable housing rotates for use as downlight or wall wash.

Features

- Provides soft, even illumination.
- Internal reflector provides wide light pattern.
- Nylon scratch guard.
- c/UL Listed.
- Dimming available.

NOTE: Integral switch on track plug housing permits interruption of power for routine lamp maintenance.

CATALOG SYSTEM AND OPTIONS

SAMPLE CATALOG NUMBER: CT9578W

Track Head	Finishes ¹	Ballast Option
CT9578 (2) FT39W/2G11	W White with clear louver BK Black with clear louver	DX1 dimming 120V
CT9579 (1) FT39W/2G11		

General Notes:

1. Other finish and louver combinations available. Consult factory.

SPECIFICATIONS




1. **Housing** - Diecast aluminum end caps for maximum strength and rigidity. Extruded aluminum body for minimum weight. White or black powder coat finish.
2. **Socket** - One or Two horizontally mounted plug-in sockets for 39 watt wall wash lamps. 2G11 single end 4 pin base.

3. **Louvers** - Specular low brightness aluminum designed for excellent visual cutoff with maximum lumen output. 8 cells.
4. **Ballast** - One electronic ballast for either one or two lamp models. Available with energy efficient Mark X dimming ballast, 120V only.

DIMENSIONS

Legend

- Width: A
Length: B
Height: C
Depth: D

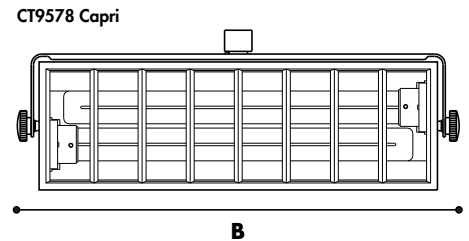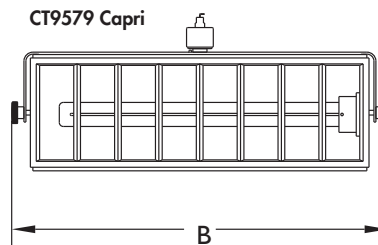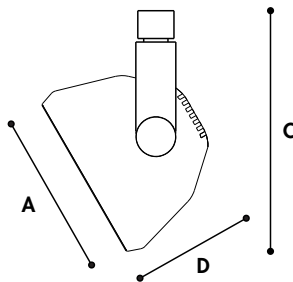


Catalog #	Dimensions			
	A	B	C	D
CT9578	6 1/4" (156 mm)	20" (508 mm)	8 3/8" (213 mm)	4 3/8" (111 mm)
CT9579	6 1/4" (156 mm)	20" (508 mm)	8 3/8" (213 mm)	4 3/8" (111 mm)

REV. 09/10

CT9578

Description: Capri Wall Wash
 Lamp: (2) FT39W/2G11
 Total Lumens: 5800
 0° Candela: 1137
 Test Report Number: LRL 695-3



 Symbol for
Fixture Location

Single wall wash unit 3 feet from wall tilted at 45°.

Array of wall wash units on 3 ft. ctrs 3 ft. from wall tilted at 45°.

Array of wall wash units on 4 ft. ctrs 3 ft. from wall tilted at 45°.

Distance from ceiling in feet.	Distance on wall in feet To right of fixture centerline.								
	0.0	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0
1.0	124	98	55	24	10	4	1	.5	.2
2.0	83	70	44	24	12	6	3	1	.4
3.0	46	41	29	18	11	6	3	2	.8
4.0	31	28	21	15	10	6	4	2	1
5.0	20	18	15	11	8	5	4	2	1
6.0	13	12	11	9	6	5	3	2	1
7.0	9	8	7	6	5	4	3	2	1
8.0	6	6	5	5	4	3	2	2	1
9.0	4	4	4	3	3	3	2	2	1

Table represents half of illuminated area.

Distance from ceiling in feet.	Distance on wall in feet To right of fixture centerline.			
	0.0	1.0	2.0	3.0
1.0	176	167	167	176
2.0	136	133	133	136
3.0	89	89	89	89
4.0	69	69	69	69
5.0	51	51	51	51
6.0	38	38	38	38
7.0	29	29	29	29
8.0	23	23	23	23
9.0	17	17	17	17

Distance from ceiling in feet.	Distance on wall in feet To right of fixture centerline.				
	0.0	1.0	2.0	3.0	4.0
1.0	145	126	113	126	145
2.0	108	100	93	100	108
3.0	68	67	65	67	68
4.0	52	52	51	52	52
5.0	39	39	38	39	39
6.0	29	29	29	29	29
7.0	23	22	22	22	23
8.0	18	17	17	17	18
9.0	14	13	13	13	14

Single wall wash unit 4 feet from wall tilted at 45°.

Array of wall wash units on 3 ft. ctrs 4 ft. from wall tilted at 45°.

Array of wall wash units on 4 ft. ctrs 4 ft. from wall tilted at 45°.

Distance from ceiling in feet.	Distance on wall in feet To right of fixture centerline.								
	0.0	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0
1.0	73	62	44	25	13	7	3	1	.6
2.0	58	52	38	25	14	8	4	2	1
3.0	41	37	28	20	13	8	5	3	2
4.0	27	24	20	15	10	7	5	3	2
5.0	19	18	15	12	9	6	4	3	2
6.0	14	13	12	9	7	6	4	3	2
7.0	10	10	9	7	6	5	4	3	2
8.0	7	7	7	6	5	4	3	2	2
9.0	5	5	5	4	4	3	3	2	2

Table represents half of illuminated area.

Distance from ceiling in feet.	Distance on wall in feet To right of fixture centerline.			
	0.0	1.0	2.0	3.0
1.0	129	127	127	129
2.0	116	116	116	116
3.0	81	91	91	91
4.0	66	66	66	66
5.0	55	55	55	55
6.0	44	44	44	44
7.0	35	35	35	35
8.0	28	28	28	28
9.0	22	23	23	22

Distance from ceiling in feet.	Distance on wall in feet To right of fixture centerline.				
	0.0	1.0	2.0	3.0	4.0
1.0	100	95	94	95	100
2.0	89	87	86	87	89
3.0	69	69	67	69	69
4.0	50	50	50	50	50
5.0	41	41	41	41	41
6.0	33	33	33	33	33
7.0	27	27	29	27	27
8.0	22	22	22	22	22
9.0	18	18	18	18	18

Metric Conversion Factors

To convert feet to meters multiply by: .3048
 To convert footcandles to lux multiply by: 10.76

Philips Capri reserves the right to make changes without notice.©2010