


NITE BRITES

JOB NAME _____

TYPE _____

WLR-LARGE GLASS LOW PROFILE WALL PACK


250-400 watt Metal Halide
250-400 watt High Pressure Sodium

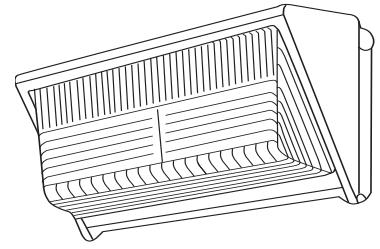

The Large Low Profile Wall Pack offers reliable performance with a wide range of uses. It delivers the lighting needed for the exteriors of retail buildings, businesses, walkways, underpasses or entrance doors.

ORDERING MATRIX

SAMPLE CATALOG NUMBER: WLR400MMT-LP

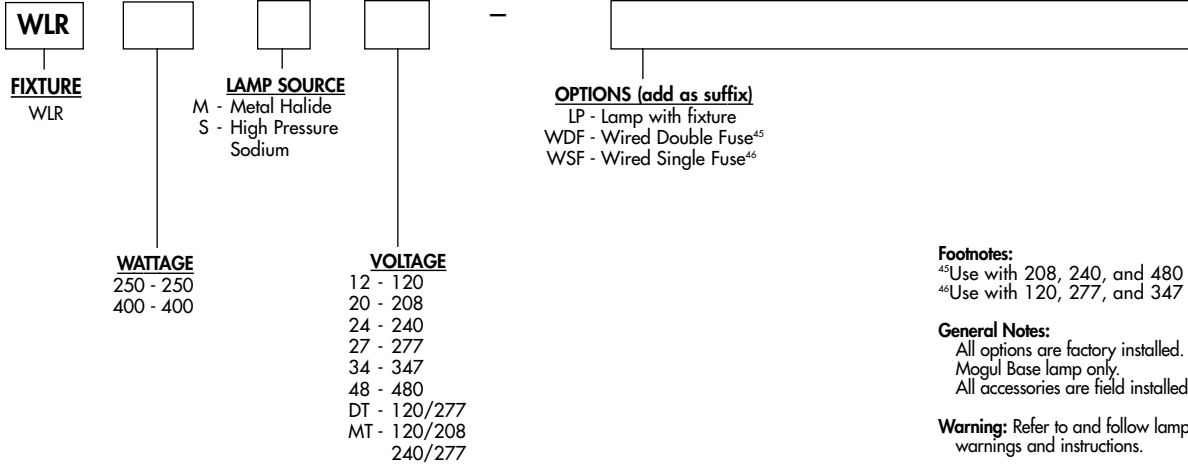

Footnotes:

⁴⁵Use with 208, 240, and 480 volt.
⁴⁶Use with 120, 277, and 347 volt.

General Notes:

All options are factory installed.
Mogul Base lamp only.
All accessories are field installed.




Warning: Refer to and follow lamp manufacturer's warnings and instructions.

ACCESSORIES (order separately)

- WGWLR - Wire Guard
- VCWLR - Cutoff Visor
- VSWLR - Vandal Shield
- RDA-WLR - Replacement Door Assembly
- PEC-MT - Photo Control multi-volt
- PEC-48 - Photo Control 480 volt

(For additional descriptions of Wall Light accessories refer to sheet number OA-50030.1)

DIMENSIONS

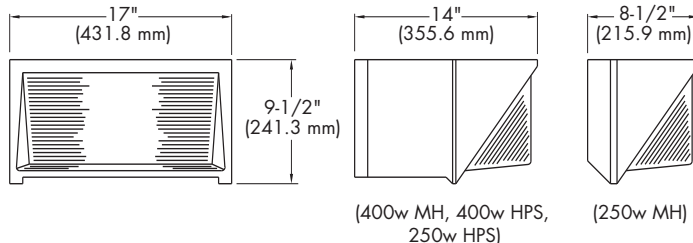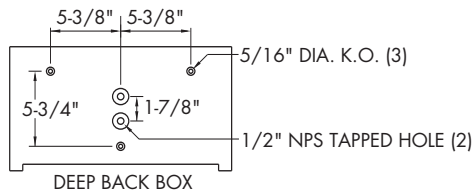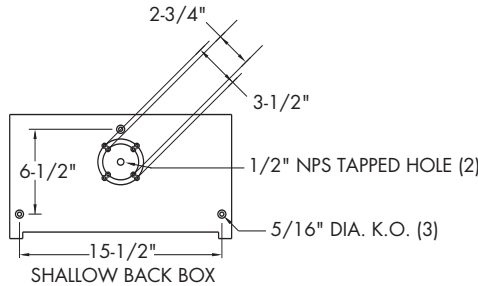

ENERGY DATA

HIGH PRESSURE SODIUM


CWA BALLAST INPUT WATTS
250 watt-295 watts
400 watt-464 watts

METAL HALIDE

CWA BALLAST INPUT WATTS
250 watt-285 watts
400 watt-485 watts

WEIGHT = 35 lbs. (max.)

PHOTOMETRICS

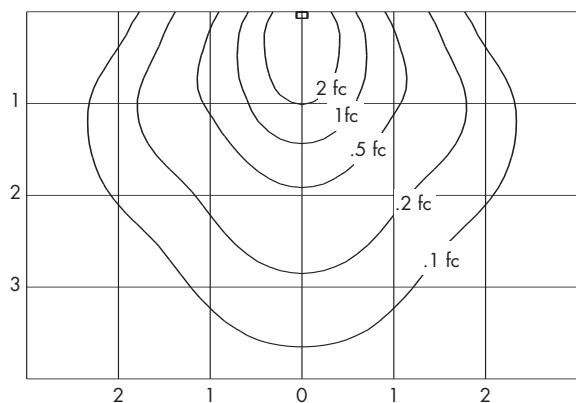

UNITS SHOWN IN TERMS OF MOUNTING HEIGHT
INITIAL FOOTCANDLES SHOWN

CATALOG NUMBER: WLR400M
 TEST NUMBER: WLR400M
 LAMP: METAL HALIDE
 WATTAGE: 400
 LUMENS: 36,000
 TILT ANGLE: 0°
 MOUNTING HEIGHT: 25 FEET

LIGHT LEVEL MULTIPLYING FACTORS	
MOUNTING HEIGHT	MULTIPLIER
40'	0.39
35'	0.51
30'	0.69
25'	1.00
20'	1.56
15'	2.77


ADDITIONAL TEST NUMBERS

DESCRIPTION/CATALOG NUMBER	TEST NUMBER
WLR250M	WLR250M
WLR400S	WLR400S
WLR250S	WLR250S

PRODUCT FEATURES

UL 1598 Listed wet location, 25°C ambient, and feed-through wiring for all lamp wattages listed.

1. Heavy duty two piece, die cast aluminum housing.
2. Specular anodized aluminum reflector.
3. Silicone gasketing provides protection against moisture.
4. Mounts directly to 3-1/2" octagon or 4" square outlet box.
5. 1/2" NPS tapped holes provided in three locations for surface conduit entry or optional photo control.
6. Field adjustment bracket permits simple adjustment of beam angle.
7. Dark bronze polyester powder finish for impact, corrosion and UV resistance.
8. Clear prismatic borosilicate glass refractor is thermal and shock resistant.
9. Integral cast-in aluminum hinges permit complete removal of lens frame assembly without tools.

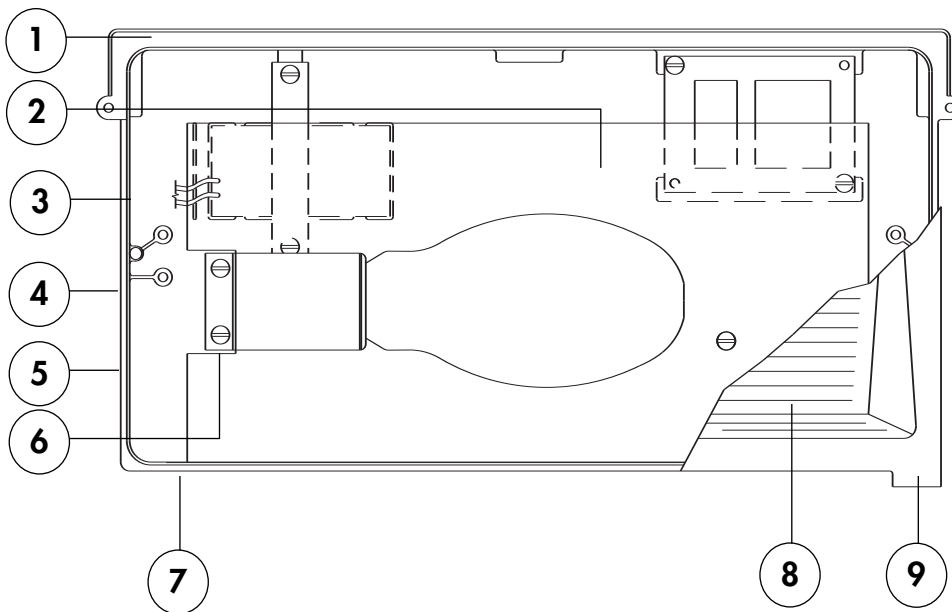

Visit our web site at www.daybritelighting.com

776 South Green Street Tupelo, MS 38804 Phone: 662-842-7212 Fax: 662-841-5501

WL-43030.1

189 Bullock Drive Markham, Ontario Canada L3P 1W4 Phone: 905-294-9570 Fax: 905-294-8911
 Day-Brite Lighting reserves the right to make changes without notice. ©February 2005. DL.5M0205
 Day-Brite Lighting is a Genlyte Thomas Group.

 **Day-Brite® Lighting**