



# RSS - ROUND STRAIGHT STEEL POLES


20'-30' Height  
5" Round



JOB NAME: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 POLE NUMBER: \_\_\_\_\_

## ORDERING MATRIX

SAMPLE CATALOG NUMBER: RSS520G11-D22

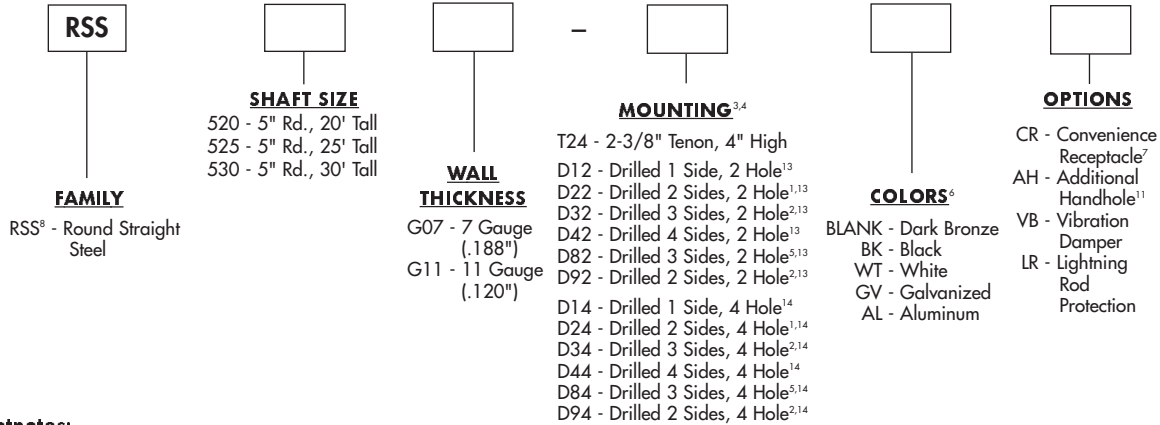

### Footnotes:

- <sup>1</sup>Drilled at 180° apart.
- <sup>2</sup>Drilled at 90° apart.
- <sup>3</sup>2 Hole Pattern for SBX400.
- <sup>4</sup>4 Hole Pattern for SBX1000.
- <sup>5</sup>Drilled at 120° apart.
- <sup>6</sup>Other colors available, consult Day-Brite Lighting or your local Genlyte Thomas Lighting Representative.
- <sup>7</sup>Convenience receptacle options provides for mounting of receptacle by other; receptacle not included.

- <sup>8</sup>All base plates and bolt circles are dependant on pole size, refer to specific pole for dimension.
- <sup>11</sup>Specify location and height from base.
- <sup>13</sup>MCLRPA4 adapter required.
- <sup>14</sup>LCLRPA4 adapter required.

## DIMENSIONS & EPA'S

Catalog No. <sup>16</sup>	Height (ft)	Shaft Size (base x top)	Mounting	Wall Thick (in)	Base Thick (in)	Base Size (in sq)	Bolt Circle (in)	Anchor Bolt (in)	80 MPH <sup>15</sup>		90 MPH <sup>15</sup>		100 MPH <sup>15</sup>	
									EPA	WT	EPA	WT	EPA	WT
RSS520G11-XXX	20'	5"	Drilled or Tenon	.120"	.75"	10.5"	8±1"	.75"x 17"x 3"	11.7	300	9.1	230	7.2	180
RSS525G11-XXX	25'	5"	Drilled or Tenon	.120"	.75"	10.5"	8±1"	.75"x 17"x 3"	7.2	180	5.5	150	4.2	150
RSS525G07-XXX	25'	5"	Drilled or Tenon	.188"	.75"	10.5"	8±1"	.75"x 17"x 3"	12.1	300	9.4	250	7.4	200
RSS530G11-XXX	30'	5"	Drilled or Tenon	.120"	.75"	10.5"	8±1"	.75"x 17"x 3"	4.2	150	3.0	125	2.2	100
RSS530G07-XXX	30'	5"	Drilled or Tenon	.188"	.75"	10.5"	8±1"	.75"x 17"x 3"	8.0	200	6.5	160	4.7	125

<sup>15</sup>Wind load capacity includes 1.3 gust factor.

<sup>16</sup>Catalog number includes four anchor bolts, nuts and washers; anchor bolt template; handhole and base plate covers; top cap for drilled poles.

RSS-20'-30' ROUND STRAIGHT STEEL POLES

**PA-46072.1**

Visit our web site at [www.dcolighting.com](http://www.dcolighting.com) or [www.nitebrites.com](http://www.nitebrites.com)

776 South Green Street Tupelo, MS 38804 Phone: 662-842-7212 Fax: 662-841-5501

189 Bullock Drive Markham, Ontario Canada L3P 1W4 Phone: 905-294-9570 Fax: 905-294-8911

Day-Brite Lighting reserves the right to make changes without notice. October 2006. HT2.5M1006  
Genlyte Thomas Group, LLC©

